

# ERV-ENERGY RECOVERY



## XEC Chilled/Hot Water Coil Unit

### XEC3000P3 Technical Data

#### Technical Specifications

##### Nominal Airflow

Supply Air (l/sec)	2500 - 3000
Exhaust Air (l/sec)	2500 - 3000
Return Air (l/sec)	2500 - 3000
Fresh Air (l/sec)	2500 - 3000

##### Supply Fan

Fan Type	EC Plug
Motor Power (Watts)	4500
External Static (Pa)	250
Fan Diameter	450
Number of Fans	1

##### Exhaust Fan

Fan Type	EC Plug
Motor Power (Watts)	4500
External Static (Pa)	250
Fan Diameter	450
Number of Fans	1

##### Electrical

Supply Fan (A)	6.8 - 6.8 - 6.8
Exhaust Fan (A)	6.8 - 6.8 - 6.8
Maximum Full Load (A)	13.6 - 13.6 - 13.6
Volt/Phase	415V/3ph

##### Controls

0-10V DC (Fan Control)	Included
24V AC Control Relay	Included
Fan Fault Signal	Included
Fan Run Status	Available
Switchboard	Yes
Circuit Breakers	Yes

##### Heat Exchanger

\*Rated at standard conditions of 35.5° db/24.0° wb

Enthalpy Media	Available
Sensible Media	Standard
Face Velocity (m/sec)	1.875
Pressure Drop (Pa)	77
Kw Recovered (Cooling)*	26.1
Kw Recovered (Heating)*	42

##### Cabinet Construction

Casing	50mm Insulated Panel
Insulation Value	R2.0
Side Access Panels	Included

##### Chilled Water Coil - if required (Nom. rating)

Total Capacity (Kw)	66.0
Max. Size FL x FH (mm)	1740 x 840
Water In (°C)/ Water Out (°C)	7° / 14°
Coil Coating	Epoxy Coating
Face Velocity (m/sec)	2.05
Stainless Steel Drain Tray	Included

##### Hot Water Coil - if required (Nom. rating)

Total Capacity (Kw)	66.0
Max. Size FL x FH (mm)	1740 x 840
Water In (°C)/ Water Out (°C)	80° / 60°
Coil Coating	Epoxy Coating
Face Velocity (m/sec)	2.05

##### Options





Economy Cycle	Available
Return Air Bypass	Available
Corrosion Resistant Lining	Available

# ERV-ENERGY RECOVERY

## XEC Chilled/ Hot Water Coil Unit – XEC3000P3 Technical Data



### Technical Drawings – XEC3000P3

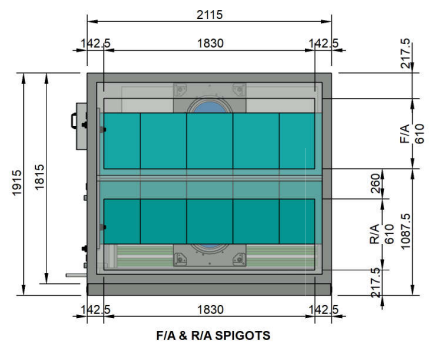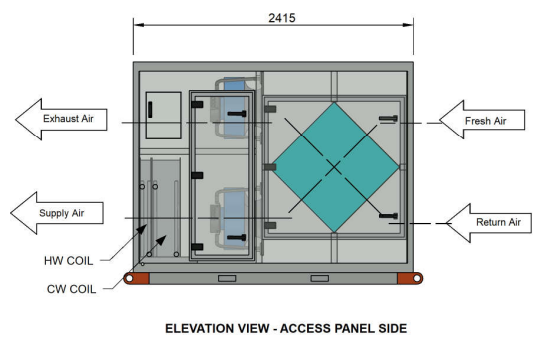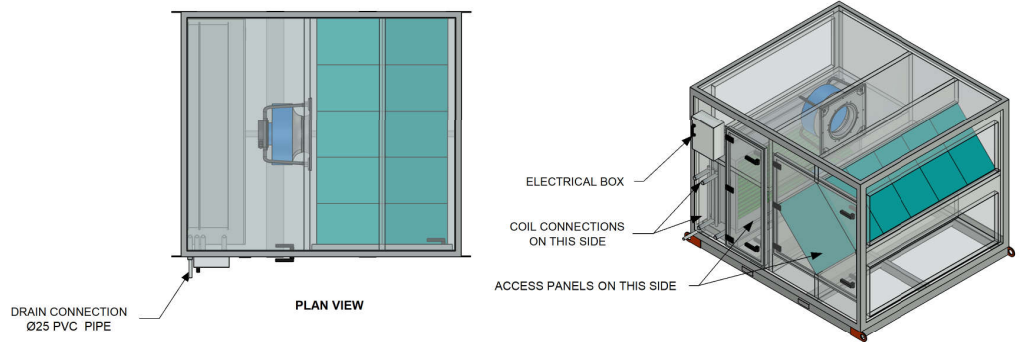

#### Dimension


Height (mm)	1915
Width (mm)	2115
Length (mm)	2415
Weight (Kg)	1275
Access Clearance (mm)	1200 (Fan & Media Access)

#### Duct Sizes

Exhaust Air (mm)	1700 x 600
Return Air (mm)	1830 x 610
Supply Air (mm)	1700 x 840
Fresh Air (mm)	1830 x 610

### Fan Performance Data

\*Duty point - 3000 L/s at 600 Pa Total Static Pressure (250Pa External Static Pressure)

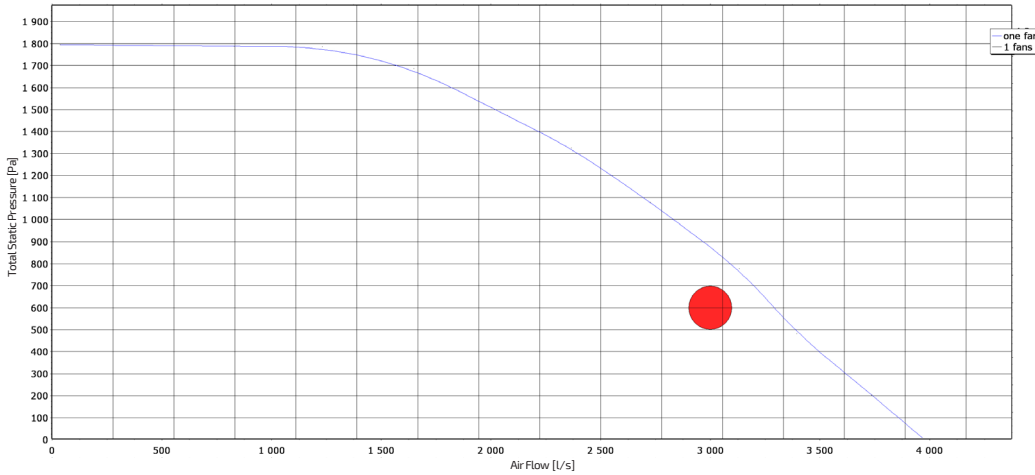


### Sound Power Levels

\*Sound power levels at 600 Pa Total Static Pressure and 3000 L/s Total Air Volume

Inlet Rating dB (A)		Outlet Rating dB (A)	
63 Hz	46.6	63 Hz	51.0
125 Hz	63.4	125 Hz	64.4
250 Hz	75.9	250 Hz	75.9
500 Hz	70.1	500 Hz	82.7
1 K Hz	78.6	1K Hz	87.1
2K Hz	80.8	2K Hz	88.0
4K Hz	80.3	4K Hz	83.8
8K Hz	85.0	8K Hz	84.4
LwA	88.8	LwA	92.7

### Wiring Diagram

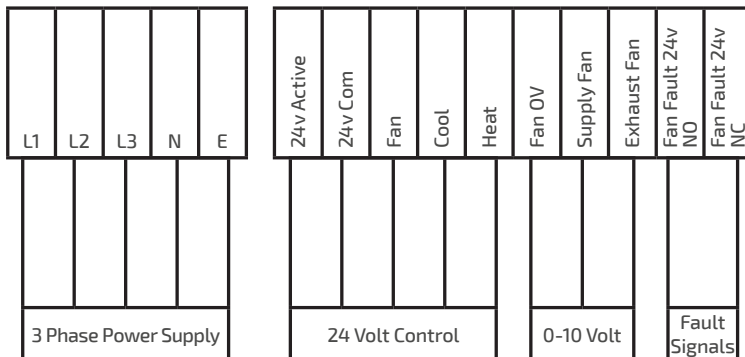

- STANDARD INCLUSIONS**
- Fan Speed Controller
  - 0-10v DC - BMS Connection, **OR**
  - 24v AC - Fan Speed Control via Pots
  - Circuit Breakers

