

# DEHUMIDIFICATION EQUIPMENT

## PACKAGED AIR CONDITIONING UNIT

### DHP500P3 TECHNICAL DATA



TECHNICAL SPECIFICATIONS	DHP500-14P3	DHP500-14P3	DHP500-22P3
DESIGN TO SUIT STANDARD CONDITIONS IN	PERTH/ADELAIDE	MELBOURNE/SYDNEY	BRISBANE/NTH QLD
<b>NOMINAL AIRFLOW</b>			
Supply Air (l/sec)	500	500	500
Fresh Air (l/sec)	500	500	500
Condensor Air (l/sec)	1120	1120	1600
Compressor Capacity (kW)	14	14	22
<b>SUPPLY FAN</b>			
Fan Type	Plug Fan	Plug Fan	Plug Fan
Fan Motor	EC Motor	EC Motor	EC Motor
Motor Power (Watts)	750	750	750
External Static (Pa)	200	200	200
Fan Diameter (mm)	250	250	250
Number of Fans	1	1	1
<b>CONDENSER FAN</b>			
Fan Type	Axial Fan	Axial Fan	Axial Fan
Fan Motor	EC Motor	EC Motor	EC Motor
Motor Power (Watts)	980	980	980
Number of Fans	1	1	1
<b>ELECTRICAL</b>			
Supply Fan FLA (A)	3.3-3.3-3.3	3.3-3.3-3.3	3.3-3.3-3.3
Condenser Fan FLA (A)	1.6-1.6-1.6	1.6-1.6-1.6	1.6-1.6-1.6
Compressor Current (A)	10-10-10	10-10-10	10-10-10
Nominal Run Current (A)	14.9-14.9-14.9	14.9-14.9-14.9	14.9-14.9-14.9
Maximum Run Current (A)	19-19-19	19-19-19	19-19-19
Volts/Phase	415V/3Ph	415V/3Ph	415V/3Ph
Switchboard	Yes	Yes	Yes
Circuit Breakers	Yes	Yes	Yes
<b>CONTROLS</b>			
0-10V DC (Supply Fan Control)	Included	Included	Included
0-10V DC (Compressor Capacity) Stage 1	Included	Included	Included
Compressor Fault	Low Level	Low Level	Low Level
Fan Fault Signal	24V Output	24V Output	24V Output
Fan Status	Optional	Optional	Optional
Fire Trip	Voltage Free Contracts	Voltage Free Contracts	Voltage Free Contracts
Low Level Controller (Remote Enable)	Included	Included	Included
Supply Air Duct Sensor	Included	Included	Included
Outdoor Ambient Sensor (Cool only models)	Optional	Optional	Optional
High Level Interface	Not Included	Not Included	Not Included
Control Relays for BMS Connection	Optional	Optional	Optional
Bypass Supply Air Damper	Included	Included	Included
Condensor Fan	Head Pressure Controlled	Head Pressure Controlled	Head Pressure Controlled

# DEHUMIDIFICATION EQUIPMENT

## PACKAGED AIR CONDITIONING UNIT

### DHP500P3 TECHNICAL DATA



TECHNICAL SPECIFICATIONS	DHP500-14P3	DHP500-14P3	DHP500-22P3
DESIGN TO SUIT STANDARD CONDITIONS IN	PERTH/ADELAIDE	MELBOURNE/SYDNEY	BRISBANE/NTH QLD
HEAT EXCHANGER			
Sensible Media	Standard	Standard	Standard
Face Velocity (m/sec)	1.27	1.27	1.27
Media Access	Removable	Removable	Removable
Pressure Drop (Pa)	26	26	26
CABINET CONSTRUCTION			
Colourbond Casing	50mm Panel	50mm Panel	50mm Panel
Galvanised Base	100x50	100x50	100x50
DESIGN TEMPERATURES			
Ambient Summer (DB/WB)	40°C / 27°C	35°C / 24°C	35°C / 27°C
Supply Air Summer (DB/WB)	24°C / 17°C	24°C / 17°C	24°C / 17°C
Supply Air Moisture Content (g/kg)	9.4	9.4	9.4
Ambient Winter (DB)	5°C	3°C	5°C
Supply Air Winter (DB)	21°C	21°C	21°C
COIL SELECTION			
Indoor Coil Circuits	1	1	1
Face Velocity (m/sec)	2	2	2
Coil Coating	Included	Included	Included
Drain Tray	Stainless Steel	Stainless Steel	Stainless Steel
COMPRESSOR DETAILS			
Total Cooling Capacity (kW)	14	14	14
Sensible Capacity (kW)	10	8	9
Latent Capacity (kW)	4	6	13
No. of Compressor	1	1	1
Stage 1	Digital 10-100% Capacity	Digital 10-100% Capacity	Digital 10-100% Capacity
Stage 2	None	None	None
Refrigerant Gas	R407C	R407C	R407C
Expansion Device	TX Biflow Valves	TX Biflow Valves	TX Biflow Valves
Total Heating Capacity (kW)	14	14	22
FILTERS			
Filter Type	F5 Deep Bed Filter	F5 Deep Bed Filter	F5 Deep Bed Filter
Number of Filters / Size	1/600 x 600 x 380d	1/600 x 600 x 380d	1/600 x 600 x 380d
OPTION			
Corrosion Resistant Lining	Available	Available	Available


# DEHUMIDIFICATION EQUIPMENT

## PACKAGED AIR CONDITIONING UNIT

### DHP500P3 TECHNICAL DATA



#### FAN PERFORMANCE DATA

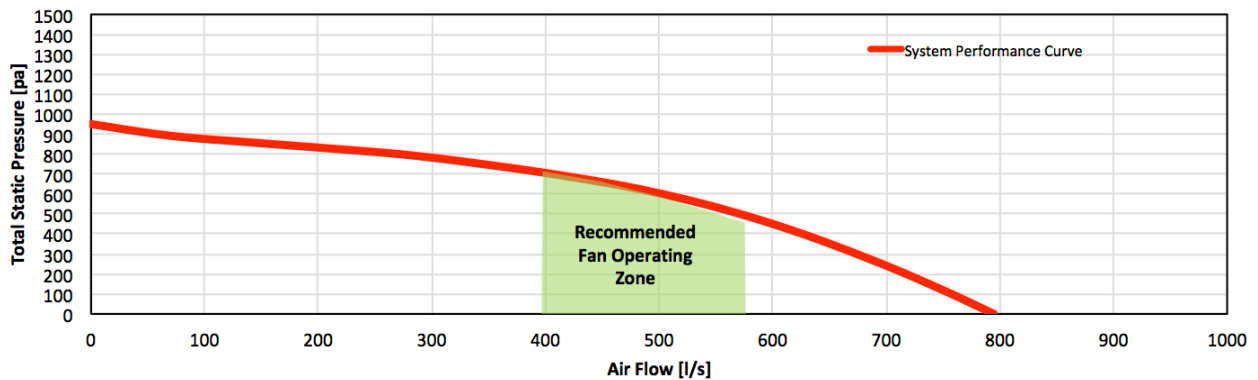

#### SOUND POWER LEVELS\*

##### INLET RATING dB

63 Hz	76.3
125 Hz	73.4
250 Hz	70.6
500 Hz	69
1K Hz	68.2
2K Hz	66.9
4K Hz	71.4
8K Hz	61
LwA	75.7

##### OUTLET RATING dB

63 Hz	68.5
125 Hz	68.6
250 Hz	74.3
500 Hz	71.2
1K Hz	72.6
2K Hz	72.2
4K Hz	67.2
8K Hz	65
LwA	77.7

\* Sound Power Levels @ 600 Pa Total Static Pressure and 500 l/s Total Air Volume.

#### Armcor Air Solutions

109-111 Northcorp Blvd, Broadmeadows VIC 3047

P 1800 244 556 E sales@armcor.com.au

W armcor.com.au

© 2018 Armcor Air Solutions reserves the right to alter products and specifications without notice and does not accept responsibility for possible errors and omissions in published documentation.  
Date: 15/06/2018 Document: DHP500P3\_techspec Version Number: V 12.2018

