

Dehumidification Equipment



DHP Dehumidification PAC Units

DHP900P3 Technical Data


Technical Specifications

	DHP900-21P3	DHP900-24P3	DHP900-39P3
DESIGN TO SUIT STANDARD CONDITIONS IN	PERTH/ ADELAIDE	MELBOURNE/ SYDNEY	BRISBANE/ NTH QLD
Nominal Airflow			
Supply Air (l/sec)	900	900	900
Fresh Air (l/sec)	900	900	900
Condensor Air (l/sec)	1600	1920	3120
Compressor Capacity (kW)	21	24	39
Supply Fan			
Fan Type	Plug Fan	Plug Fan	Plug Fan
Fan Motor	EC Motor	EC Motor	EC Motor
Motor Power (Watts)	1900	1900	1900
External Static (Pa)	250	250	250
Fan Diameter (mm)	355	355	355
Number of Fans	1	1	1
Condenser Fan			
Fan Type	Axial Fan	Axial Fan	Axial Fan
Fan Motor	EC Motor	EC Motor	EC Motor
Motor Power (Watts)	980	980	980
Number of Fans	1	1	2
Condensor Fan Control	Head Pressure Controlled	Head Pressure Controlled	Head Pressure Controlled
Electrical			
Supply Fan FLA (A)	2.6 - 2.6 - 2.6	2.6 - 2.6 - 2.6	2.6 - 2.6 - 2.6
Condenser Fan FLA (A)	1.6 - 1.6 - 1.6	1.6 - 1.6 - 1.6	1.6 - 1.6 - 1.6
Compressor Current (A)	14 - 14 - 14	18 - 18 - 18	25 - 25 - 25
Nominal Run Current (A)	18.2 - 18.2 - 18.2	12.2 - 12.2 - 12.2	30.8 - 30.8 - 30.8
Maximum Run Current (A)	24 - 24 - 24	28 - 28 - 28	39 - 39 - 39
Volt/Phase	415V/3ph	415V/3ph	415V/3ph
Switchboard	Yes	Yes	Yes
Circuit Breakers	Yes	Yes	Yes
Controls			
0-10V DC (Supply Fan Control)	Included	Included	Included
0-10V DC (Compressor Capacity)	Included	Included	Included
Compressor Fault	Low Level	Low Level	Low Level
Fan Fault Signal	24V Output	24V Output	24V Output
Fan Status	Optional	Optional	Optional
Bypass Supply Air Damper	Included	Included	Included
Compressor Enable 24V	Included	Included	Included
PC-20CC Low Level Controller	Optional	Optional	Optional
PC-30CC High Level Controller	Optional	Optional	Optional

Technical Specifications

	DHP900-21P3	DHP900-24P3	DHP900-39P3
DESIGN TO SUIT STANDARD CONDITIONS IN	PERTH/ ADELAIDE	MELBOURNE/ SYDNEY	BRISBANE/ NTH QLD
Heat Exchanger			
	*Rated at standard conditions of 35.5° db/24.0° wb		
Sensible Media	Standard	Standard	Standard
Face Velocity (m/sec)	2.28	2.28	2.28
Media Access	Removable	Removable	Removable
Pressure Drop (Pa)	72	72	72
Cabinet Construction			
Colourbond Casing	50mm Panel	50mm Panel	50mm Panel
Galvanised Base	100x50	100x50	100x50
Design Temperatures			
Ambient Summer (DB/WB)	40°C/27°C	35°C/24°C	35°C/27°C
Supply Air Summer (DB/WB)	24°C/17°C	24°C/17°C	24°C/17°C
Supply Air Moisture Content (g/kg)	9.4	9.4	9.4
Ambient Winter (DB)	5°C	3°C	5°C
Supply Air Winter (DB)	21°C	21°C	21°C
Coil Selection			
Indoor Coil Circuits	1	1	1
Face Velocity (m/sec)	2	2	2
Coil Coating	Included	Included	Included
Drain Tray	Stainless Steel	Stainless Steel	Stainless Steel
Compressor Details			
Total Cooling Capacity (kW)	21	24	39
Sensible Capacity (kW)	17	15	15
Latent Capacity (kW)	4	9	24
No. of Compressor	1	1	1
Compressor Type	Inverter 10-100% Capacity	Inverter 10-100% Capacity	Inverter 10-100% Capacity
Refrigerant Gas	R410A	R410A	R410A
Expansion Device	Electronic EV	Electronic EV	Electronic EV
Total Heating Capacity (kW)	21	24	30
Filters			
Filter Type	F5 Deep Bed Filter	F5 Deep Bed Filter	F5 Deep Bed Filter
Number of Filters / Size	1/600 x 600 x 380d	1/600 x 600 x 380d	1/600 x 600 x 380d
Option			
Corrosion Resistant Lining	Available	Available	Available

Fan Performance Data

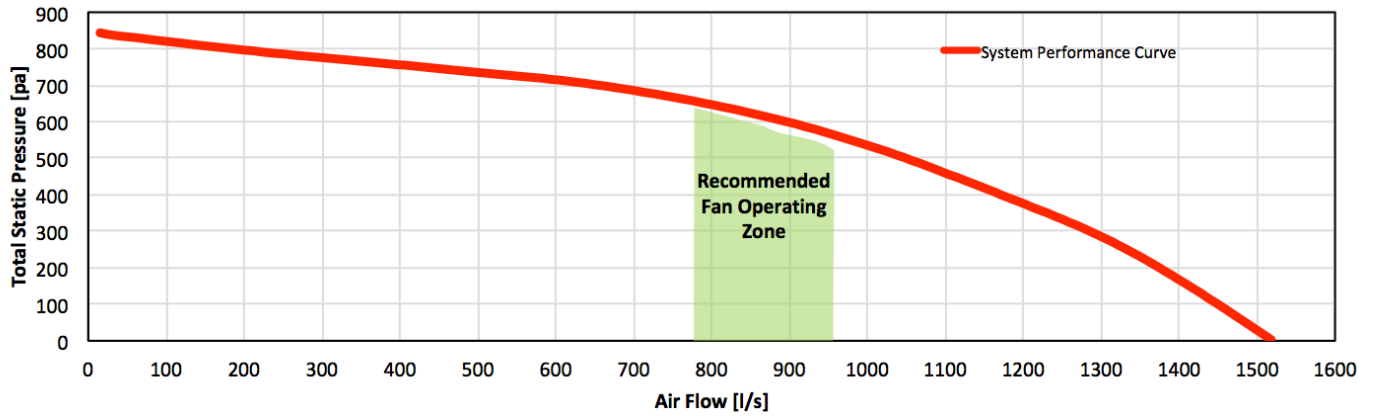

Sound Power Levels

*Sound power levels at 600 Pa Total Static Pressure and 900 L/s Total Air Volume

Inlet Rating dB		Outlet Rating dB	
63 Hz	65.4	63 Hz	68.2
125 Hz	64.7	125 Hz	66.3
250 Hz	74.4	250 Hz	76.5
500 Hz	73.8	500 Hz	76.2
1K Hz	68.3	1K Hz	78.1
2K Hz	69.3	2K Hz	75
4K Hz	66.1	4K Hz	70.7
8K Hz	62.2	8K Hz	66
LwA	76	LwA	81.8

* Sound Power Levels @600 Pa Total Static Pressure and 900 l/s Total Air Volume.

