

ERV-ENERGY RECOVERY



XEM External Mount Unit

XEM4800P3 Technical Data

Technical Specifications

Nominal Airflow

Supply Air (l/sec)	4300 - 4800
Exhaust Air (l/sec)	4300 - 4800
Return Air (l/sec)	4300 - 4800
Fresh Air (l/sec)	4300 - 4800

Supply Fan

Fan Type	EC Plug Fan
Motor Power (Watts)	4450
External Static (Pa)	250
Fan Diameter	450
Number of Fans	2

Exhaust Fan

Fan Type	EC Plug Fan
Motor Power (Watts)	4450
External Static (Pa)	250
Fan Diameter	450
Number of Fans	2

Electrical

*Cable sized to maximum FLA.
Data presented for airflow at 4800 L/s

Operating Supply Fan (A)	7.4 - 7.4 - 7.4
Operating Exhaust Fan (A)	7.4 - 7.4 - 7.4
Operating Run Current (A)	14.8 - 14.8 - 14.8
Maximum Full Load (A)	27.2 - 27.2 - 27.2
Volt/Phase	415V/3ph

Controls

0-10V DC (Fan Control)	Included
24V AC Fan Enable Relay	Included
Fan Fault Signal 24V Output	Included
Fan Control Status	Available
Switchboard	Yes
Circuit Breakers	Yes

Heat Exchanger

*Rated at standard conditions of 35.5° db/24.0° wb

Enthalpy Media	Standard
Sensible Media	Available
Face Velocity (m/sec)	1.9
Pressure Drop (Pa)	155.6
Kw Recovered (Cooling)*	73.3
Kw Recovered (Heating)*	84.4

Cabinet Construction

Casing	50mm Panel
Finish	Surf Mist Colourbond
Insulation Value	R2.0
Side Access Panels	Included


Options

Chilled Water/Hot Water Coil	Available (Model XEC4800)
Economy Cycle	Available (Model XEM4800P3-E)
Return Air Bypass	Available



ERV-ENERGY RECOVERY

XEM External Mount Unit – XEM4800P3 Technical Data


Technical Drawings – XEM4800P3




PLAN VIEW

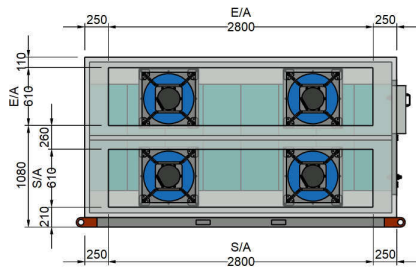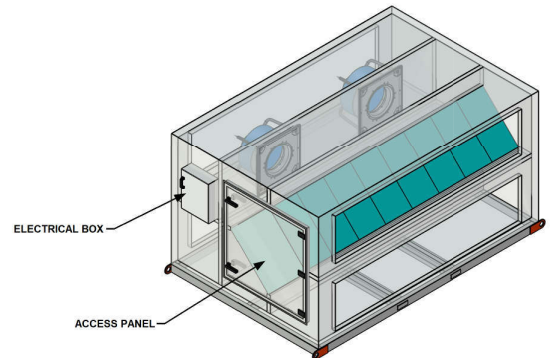

E/A & S/A SPIGOTS

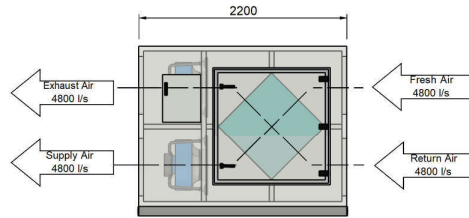

ELEVATION VIEW - ACCESS PANEL SIDE

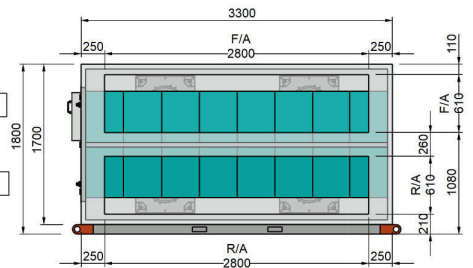


F/A & R/A SPIGOTS

Dimension	
Height (mm)	1800
Width (mm)	3300
Length (mm)	2200
Weight (Kg)	1140
Access Clearance (mm)	1200 (Fan & Media Access)
Access Clearance (mm)	900 (Electrical Controls)

Duct Sizes	
Exhaust Air (mm)	2800 x 610
Return Air (mm)	2800 x 610
Supply Air (mm)	2800 x 610
Fresh Air (mm)	2800 x 610

Fan Performance Data

*Duty point - 4800 L/s at 600 Pa Total Static Pressure (250Pa External Static Pressure)

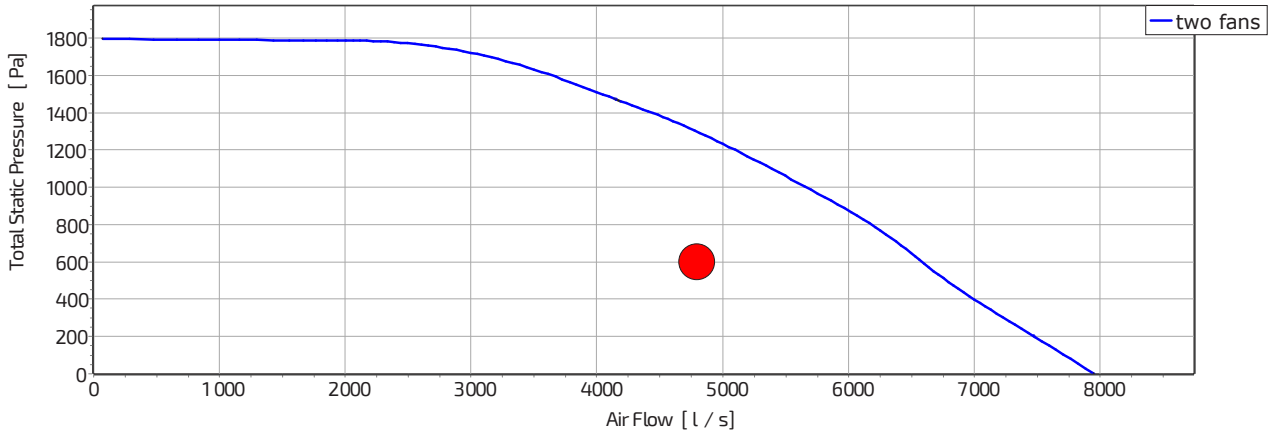


Sound Power Levels

*Sound power levels at 600 Pa Total Static Pressure and 4800 L/s Total Air Volume

Inlet Rating dB (A)		Outlet Rating dB (A)	
63 Hz	48.5	63 Hz	51.0
125 Hz	65.7	125 Hz	67.1
250 Hz	74.2	250 Hz	73.4
500 Hz	76.6	500 Hz	80.1
1 K Hz	76.7	1K Hz	84.9
2K Hz	78.3	2K Hz	85.5
4K Hz	81.6	4K Hz	83.8
8K Hz	76.6	8K Hz	78.8
LwA	85.8	LwA	90.4

Wiring Diagram

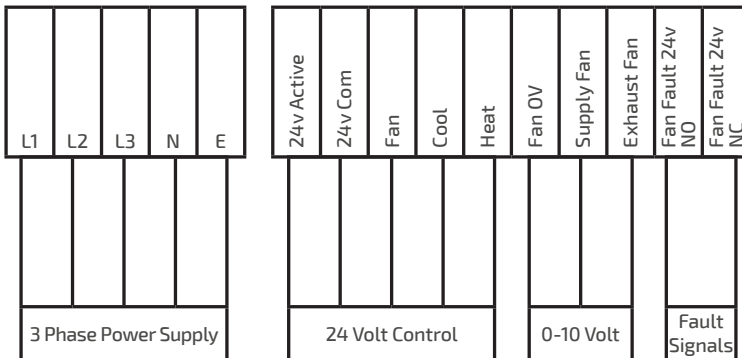

STANDARD INCLUSIONS

- Fan Speed Controller
- 0-10v DC - BMS Connection, **OR**
- 24v AC - Fan Speed Control via Pots
- Circuit Breakers

