

ERV-ENERGY RECOVERY



XEM External Mount Unit

XEM6000P3 Technical Data

Technical Specifications

Nominal Airflow

Supply Air (l/sec)	5500 - 6000
Exhaust Air (l/sec)	5500 - 6000
Return Air (l/sec)	5500 - 6000
Fresh Air (l/sec)	5500 - 6000

Supply Fan

Fan Type	EC Plug Fan
Motor Power (Watts)	4450
External Static (Pa)	250
Fan Diameter	450
Number of Fans	2

Exhaust Fan

Fan Type	EC Plug Fan
Motor Power (Watts)	4450
External Static (Pa)	250
Fan Diameter	450
Number of Fans	2

Electrical

*Max FLA to be used to size supply cables and relevant safety devices

Total Run Current (A)	20.8 - 20.8 - 20.8
Maximum Full Load (A)	27.2 - 27.2 - 27.2
Power Supply (V/Ph/Hz)	415/3/50

Controls

0-10V DC (Fan Control)	Included
24V AC Fan Enable Relay	Included
Fan Fault Signal 24V Output	Included
Fan Control Status	Available
Switchboard	Yes
Circuit Breakers	Yes

Heat Exchanger

*Rated at standard conditions of 35.5° db/24.0° wb

	Enthalpy	Sensible
Corrosion Resistant Media	Not Available	Available
Face Velocity (m/sec)	2.1	1.9
Pressure Drop (Pa)	225	77.64
Kw Recovered (Cooling)*	100	50.6
Kw Recovered (Heating)*	117	61

Cabinet Construction

Casing	50mm Panel
Finish	Surf Mist Colourbond
Insulation Value	R2.0
Side Access Panels	Included


Options

Chilled Water/Hot Water Coil	Available (Model XEC6000)
Economy Cycle	Available (Model XEM6000P3-E)
Return Air Bypass	Available



ERV-ENERGY RECOVERY

XEM External Mount Unit – XEM6000P3 Technical Data


Technical Drawings – XEM6000P3

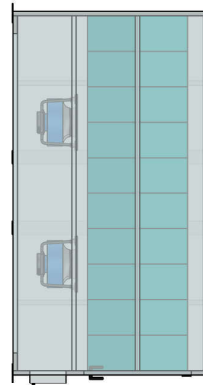


PLAN VIEW

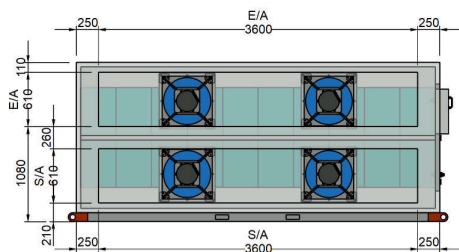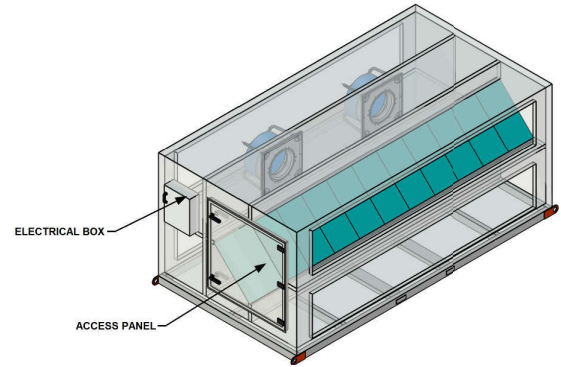

E/A & S/A SPIGOTS

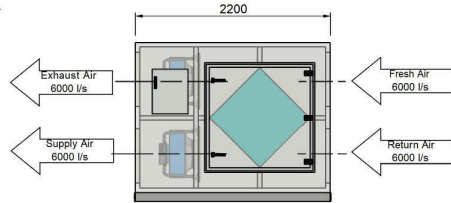

ELEVATION VIEW - ACCESS PANEL SIDE

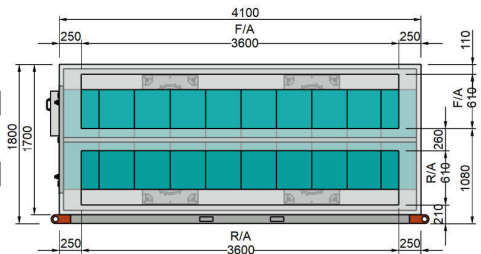

F/A & R/A SPIGOTS

Dimension


Height (mm)	1800
Width (mm)	4100
Length (mm)	2200
Weight (Kg)	1465
Access Clearance (mm)	1200 (Fan & Media Access)
Access Clearance (mm)	900 (Electrical Controls)

Duct Sizes

Exhaust Air (mm)	3600 x 610
Return Air (mm)	3600 x 610
Supply Air (mm)	3600 x 610
Fresh Air (mm)	3600 x 610

Fan Performance Data

*Duty point - 6000 L/s at 600 Pa Total Static Pressure (250Pa External Static Pressure)

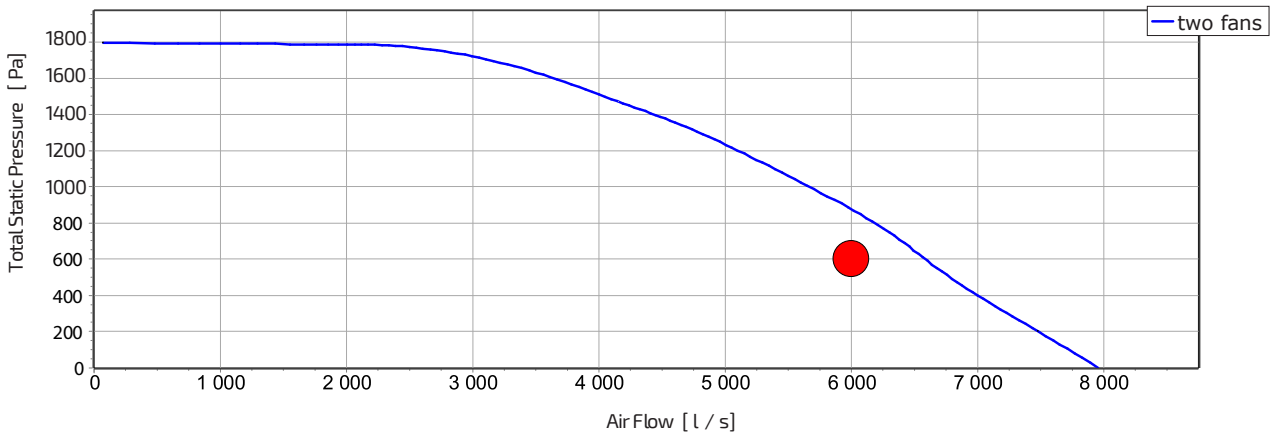


Sound Power Levels

*Sound power levels at 600 Pa Total Static Pressure and 6000 L/s Total Air Volume

Inlet Rating dB (A)		Outlet Rating dB (A)	
63 Hz	49.6	63 Hz	54.0
125 Hz	66.4	125 Hz	67.4
250 Hz	78.9	250 Hz	78.9
500 Hz	83.1	500 Hz	85.7
1 K Hz	81.6	1K Hz	90.1
2K Hz	83.8	2K Hz	91.0
4K Hz	83.3	4K Hz	86.8
8K Hz	88.0	8K Hz	87.4
LwA	91.8	LwA	95.7

Wiring Diagram

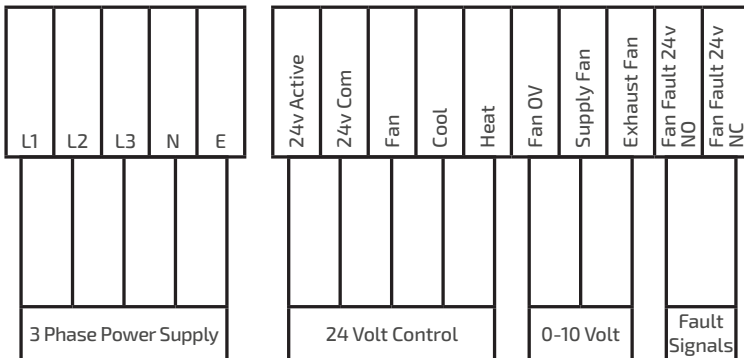

STANDARD INCLUSIONS

- Fan Speed Controller
- 0-10v DC - BMS Connection, **OR**
- 24v AC - Fan Speed Control via Pots
- Circuit Breakers

